

SST-001

Heat seal tester

NEW

Contact-free, high-speed seal testing

- High speed 1,000mm/sec
- Digitization threshold
- Possible to incorporate into an existing line on compact test heads
- Minimum detectable defect size : width 1mm


Application example

Pouch heat sealing part defect testing

Supports various thickness



External dimensions

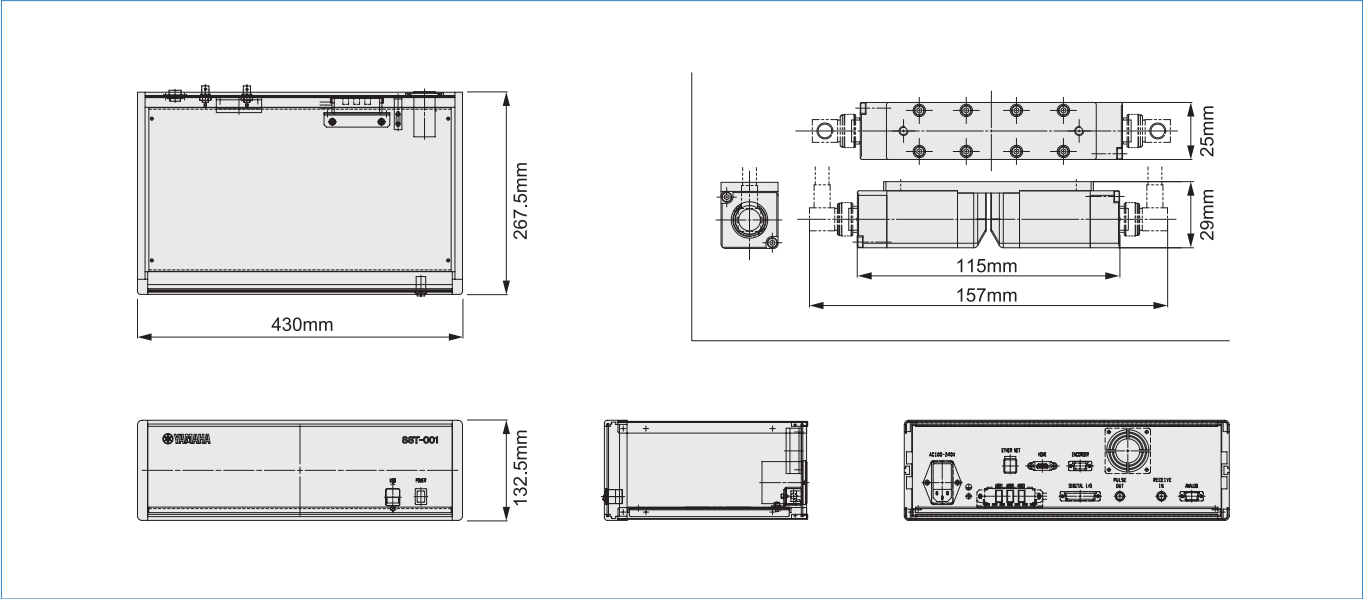

Production specification

Product composition	Main body (PC, transmitted & received board) Sensor head Display Keyboard Mouse
Scanning range	1mm
Scanning speed	1000mm / sec
Control PC	PC: Built-in product OS: Windows 10 Input: Keyboard / mouse Display: LCD panel display (HDMI)
Data	SSD
Language	English
Power voltage, power supply	AC100~240V, 50/60Hz, 0.5kVA
Weight	Sensor head 0.3kg Control box 8kg
Usage environment	Temp 5~40°C, no condensation

Notice : The contents of this catalog are subject to change without notice.

YAMAHA FINE TECHNOLOGIES CO., LTD.
FA Division

283 Aoya-cho, Minami-ku, Hamamatsu 435-8568, Japan
TEL 053(467)3601 FAX 053(467)3613
<https://www.yamahafinotech.co.jp/en/>



The contents of this catalog are subject to change without notice.

